



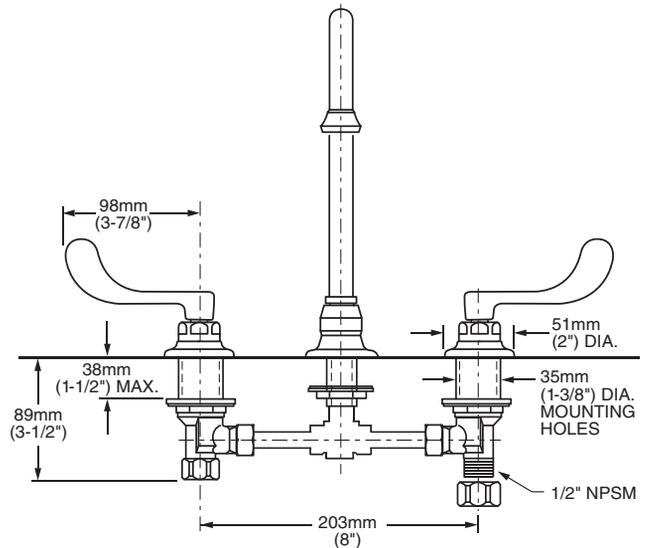

6540.171 Shown

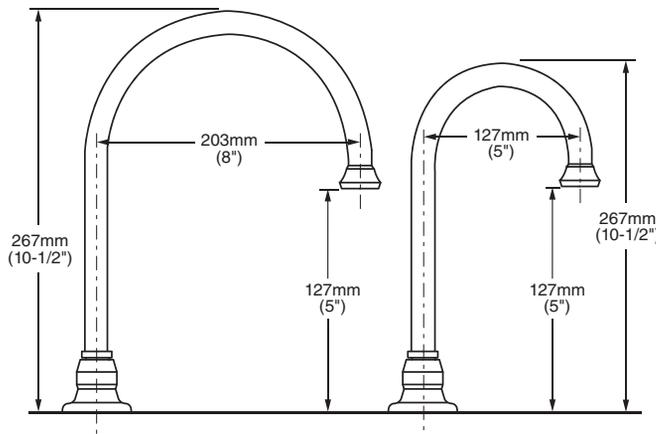

**GENERAL DESCRIPTION:**

Durable cast brass construction. Cast brass valve bodies with 8" rigid copper connection with compression fittings. 1/2" male threaded inlet shanks with brass coupling nuts. 1/4 turn ceramic disc valve cartridges. Field-convertible rigid/swivel gooseneck spout. Vandal-Resistant Wrist Blade handles with blue & red color indexes. 1.5 gpm/5.7L/min. maximum flow rate.

**PRODUCT FEATURES:**

**Rose Spray Outlet:** Multi-stream spray outlet. Pressure compensating design provides a constant water flow of 1.5 gpm throughout the pressure range.

**Solid Brass Construction:** Durable - Excellent in high use applications. Ideal for prolonged contact with water.

**Ceramic Disc Valve Cartridges:** Assures a lifetime of drip-free performance.

**Field-Convertible Rigid/Swivel Spout:** Easily converted in the field.

**Lead Free:** Faucet contains ≤ 0.25% total lead content by weighted average.

**SUGGESTED SPECIFICATION:**

Two handle widespread lavatory faucet shall feature cast brass valve bodies with 8" rigid copper connection. Shall feature water-conserving 1.5 gpm/5.7L/min. pressure compensating rose spray. Vandal-Resistant wrist blade handles. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Shall also feature field-convertible rigid/swivel spout. Fitting shall be American Standard Model # 6540.17\_.002.




**MONTERREY® 1.5 GPM ROSE SPRAY  
TWO-HANDLE 8" WIDESPREAD LAVATORY FAUCET  
WITH RIGID/SWIVEL GOOSENECK SPOUT**

**CODES AND STANDARDS**

These products meet or exceed the following codes and standards:

- ANSI A117.1**
- ASME A112.18.1**
- CSA B 125**
- NSF 61/Section 9 and Annex G**

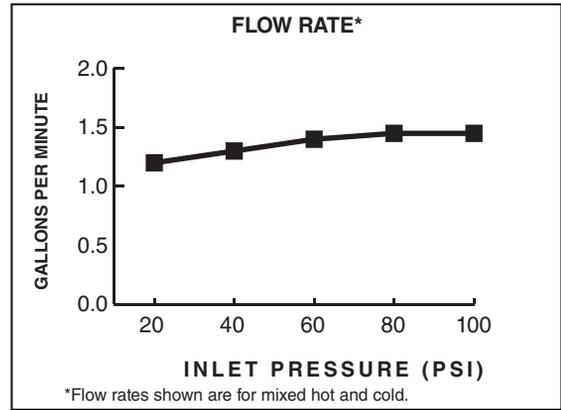

Product Number	Description	Finish
		Polished Chrome
		002
6540.171	Widespread lavatory faucet with field-convertible rigid/swivel gooseneck spout with 5" reach. 1.5 gpm/5.7 L/min pressure compensating rose spray. Vandal-resistant lever handles. Less drain & pop-up hole.	
6540.179	Widespread lavatory faucet with field-convertible rigid/swivel gooseneck spout with 8" reach. 1.5 gpm/5.7 L/min pressure compensating rose spray. Vandal-resistant wrist blade handles. Grid strainer drain.	

 **MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES**