

# 33" undermount double-bowl workstation kitchen sink K-8669-5UA3

#### **Features**

- 36" minimum base cabinet width
- Large/medium bowls
- 9" (229 mm) depth provides generous workspace
- Five oversized faucet holes
- Oversized holes allow for easy installation of faucets and accessories
- Bowl slopes toward drain to minimize water pooling
- Offset drains increase workspace in the sink and storage space underneath
- Includes K-6239 colander with integral cutting board, K-6194 utility rack with soaking cup, and K-9234 left-hand bottom sink rack



KOHLER® enameled cast iron

#### Installation

Undermount

## **Recommended Products/Accessories**

K-9234 Left-Bowl Sink Rack

K-8801 Sink drain and strainer with tailpiece

K-8799 Sink drain and strainer basket

K-23726 Drain treatment

K-23725 Cast iron cleaner

1411886 Undermount sink kit 23"

# **Optional Products/Accessories**

K-11352 Disposal Flange with Stopper K-9000 P-Trap

#### **Included Components**

K-6194 Utility Rack With Soaking Cup K-6239 Colander with Cutting Board K-9234 Left-Bowl Sink Rack



### Codes/Standards

ASME A112.19.1/CSA B45.2

# KOHLER® Enameled Cast Iron Kitchen and Bathroom Sink Lifetime Limited Warranty

See website for detailed warranty information.

#### **Available Colors/Finishes**


Color tiles intended for reference only.

Color	Code	Description
	0	White
	FF	Sea Salt™
	96	Biscuit
	NY	Dune
	95	Ice™ Grey
	58	Thunder™ Grey
	7	Black Black™
	TRF	Truffle



# **Riverby®** 33" undermount double-bowl workstation kitchen sink

K-8669-5UA3

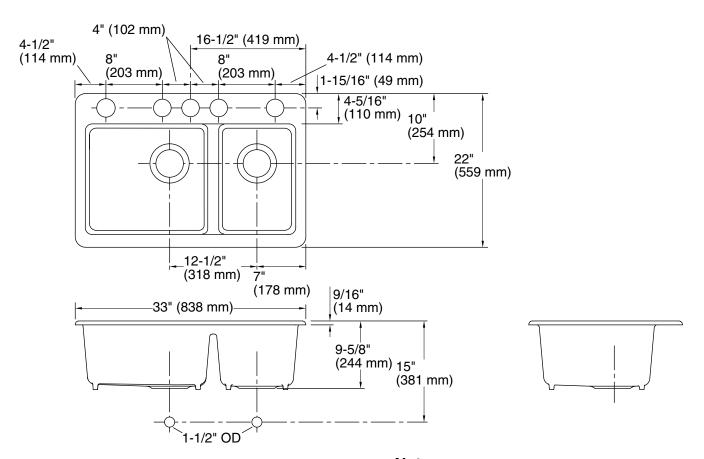

#### **Technical Information**

All product dimensions are nominal.

36" (914 mm) Min. base cabinet

width:

Length: 17-9/16" (446 mm) Bowl area (Left):

> Width: 17-1/4" (438 mm) Bowl depth: 9" (229 mm) Water depth: 9" (229 mm)

Length: 11-1/16" (281 mm)

Bowl area (Right): Width: 17-1/4" (438 mm) Bowl depth: 9" (229 mm)

> Water depth: 9" (229 mm) 5

Number of deck

holes:

Drain hole: 3-7/8" (98 mm)

Template: 1166727-7, required, included

#### **Notes**

Install this product according to the installation instructions.

