## **KOHLER** Faucets

## Rite-Temp® 1.75 gpm shower faucet trim set K-TS27404-4G

#### **Features**

- Pressure-balancing diaphragm technology maintains outlet temperature within +/-3°F during water pressure fluctuations.
- Antiscald protection.
- A single handle controls both on/off activation and temperature setting.
- Includes faceplate with ADA-compliant metal level handle.
- Includes single-function 1.75 gpm (6.6 lpm) showerhead.
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup.
- Includes shower arm and flange.
- Coordinates with other products in the Riff collection.

#### Material

- Premium material construction with metal handle ensures reliability and durability.
- KOHLER finishes resist corrosion and tarnishing.

#### Installation

 Requires Rite-Temp® pressure-balancing valve (sold separately).

## **Required Products/Accessories**

K-304 Series Rite-Temp® Valves

or

K-8304 Series Rite-Temp® Valve & Cartridge Kits

or

K-8300 Series Rite-Temp® Valve Body Rough-ins K-8305 Series Rite-Temp® Cartridges

or

K-2971-KS 3/4" Pressure-balancing Valve

#### Adapters, Rough-in and Extension Kits

10350 Range: 3-1/2" (89 mm) - 4-1/4" (108 mm)

## **Recommended Products/Accessories**

K-23723 Faucet cleaner

#### **Optional Products/Accessories**

K-10350 Deep rough-in kit

K-10351 Test cap for K-8300 Series valve bodies







#### Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC)

# KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.


#### **Available Colors/Finishes**

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	BN	Vibrant® Brushed Nickel
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne Brass



## Rite-Temp® 1.75 gpm shower faucet trim set K-TS27404-4G

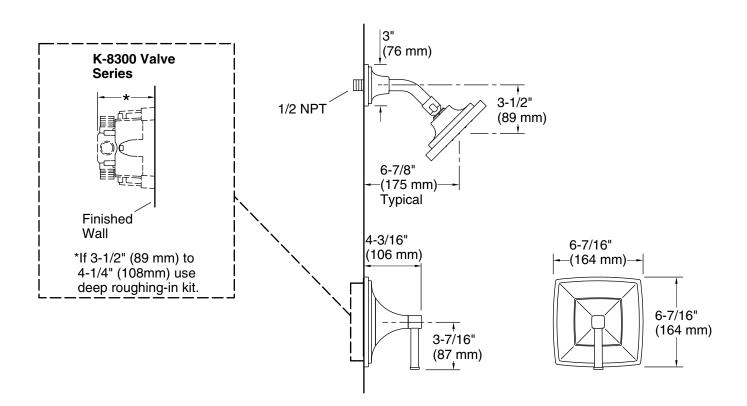

## **Technical Information**

All product dimensions are nominal.

Drain included: No

## **Showerhead/Body Spray:**

Rated maximum 1.75 gal/min (6.6 l/min)

flow:

Pressure: 45 psi (3.1 bar)

#### **Notes**

Install this product according to the installation instructions.

