

## Bathtub and Whirlpool Features \_\_\_\_\_

- 72" x 42" x 24" rectangular bathtub
- Sculpted armrests and lumbar backrest
- Two pillows
- Two-person tub
- Mansfield<sup>®</sup> Limited Ten Year Warranty
- Available in standard colors (white, almond, biscuit and bone) and premium colors (British khaki, sterling silver, black and ice gray)

### **Basic Whirlpool Features**

- Luxury Whirlpool Features
- Hydro-V back jet system
- Single speed pump
- 1-button electronic keypad
- Color match trim
- Dual air controls

- Hydro-V back jet systemVariable speed pump
- 5-button electronic keypad with digital temperature readout
- Metal trim upgrades
- Chromotherapy system
- In-line heater



Model 5058LUX

# Options \_\_\_\_\_

Cable Drain			Lift and Turn Drain		
Model # Description		Model #	Description		
SW1319	Standard Colors		PF1320	Polished Chrome	611910
SW1320	Polished Chrome	5	PF1321	Everbrass (PVD)	
SW1321	Everbrass (PVD)	-	PF1322	Brushed Nickel	
SW1322	Brushed Nickel		PF1323	Oil Rubbed Bronze	
SW1323	Oil Rubbed Bronze	۲	SWA200	Custom Pillow	
SWP150	Factory Installed Nailing Flange	3	SWAP00	Nailing Flange Kit	Munifield

## Whirlpool Options \_\_\_\_\_

Metal Trim					
Model #	Description		Model #	Description	
SW1335	Chrome				
SW1336	Everbrass (PVD)	000 000	SWP151	In-line water heater	1 - 100 - 4
SW1337	Brushed Nickel				
SW1338	Oil Rubbed Bronze				



#### MADE IN USA




# **Specifications**

Model #	Description	Codes/Standards
5558	72" X 42" X 24" Rectangular Bathtub	
5058BAS	72" X 42" X 24" Basic Whirpool Package	USPC USPC
5058LUX	72" X 42" X 24" Luxury Whirpool Package	· · · · · · · · · · Intertek

Specification	Description	Specification	Description
Material	Acrylic, fiberglass reinforced	Number of Jets	16
Construction	Self-contained, pre-plumbed whirlpool bath, with heat-bent rigid PVC pipe, mounted on a pre-leveled base	Water Capacity	60 gal. (min.) / 72 gal. (max.)
Pump Motor	Basic: 1.5 HP Single speed induction pump Luxury: 1.5 HP Variable speed induction pump	Floor Loading Weight	47 lbs. / sq. ft. (229 kg/m <sup>2</sup> )
Electrical Requirements	Basic: One 120V, 20 Amp, GFCI dedicated circuit. Optional heater: separate 120V, 20 Amp, GFCI dedicated circuit. Luxury: Two separate 120V, 20 Amp, GFCI dedicated circuits.	Shipping Weight	whirlpool - 175 lbs. bathtub - 155 lbs.
On/Off Control	Basic: 1-button electronic control pad Luxury: 5-button electronic control pad with digital readout showing temperature of water, speed of pump and time remaining in 20-minute cycle.	Warranty	Limited Ten Year

# **Technical Information**

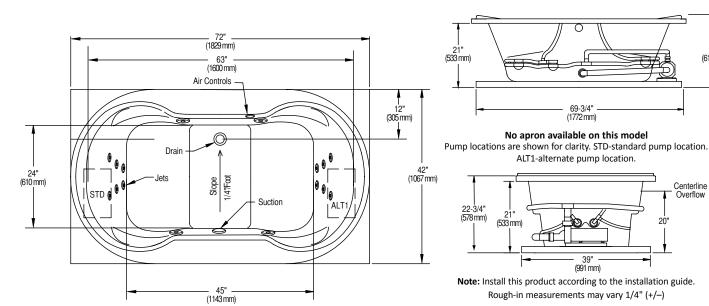

Centerline Overflow

20

24" (610 mm)

### MADE IN USA

These dimensions are nominal and subject to change without notice.

When tested for compliance to the requirements of ASME A112.19.7M for "Whirlpool Bath Appliances" and ANSI Z124.1.2M "American National Standard for Plastic Bathtub and Shower Units", the tested units are found to comply and are acceptable for listing under IAPMO R & T.

Certified for permanent electrical connection only.

Mansfield Plumbing Products LLC • Customer Service Toll Free 877-850-3060 • Fax 419-938-6234 Website: www.mansfieldplumbing.com • Email: custserv@mansfieldplumbing.com