**Rectangular Whirlpool or Bathtub** 



### Features \_\_\_\_\_

- 60" x 42" x 20-1/4" Rectangular whirlpool or bathtub
- Six powerful Ultra-Swirl jets
- Optional removable apron
- Dual air knobs for total jet control
- Limited One-Year Warranty
- Available in standard colors: white, almond, biscuit and bone



Model 6024 (Shown with trim upgrade and Lift and Turn drain)

## Options \_\_\_\_

#### Lift and Turn Drain

Model #	Description		Model #	Description		
			SWAP00	Nailing flange kit		
PF1321	PF1322 Brushed Nickel		SWP150	Factory installed nailing flange		
PF1323			PF1325A	5' Removable apron		

# Whirlpool Option \_\_\_\_\_

#### **Metal Trim**

Model #	Description		Model #	Description	
PF1335	Polished Chrome	2 A A			
PF1336	Everbrass (PVD)	8 8 8 8 8	SWP151	In-line Water Heater	
PF1337	Brushed Nickel				TITL &
PF1338	Oil Rubbed Bronze				






## **Specifications**

Model #	Description	Codes/Standards
6024	60" x 42" x 20-1/4" Rectangular whirlpool	U P C USPC USPC
6524	60" x 42" x 20-1/4" Rectangular bathtub	o Intertek

Specification	Description	Specification	Description
Material	Acrylic, fiberglass reinforced	Number of Jets	6
Construction	Self-contained, pre-plumbed whirlpool bath mounted on a pre-leveled base	Water Capacity	42 gal. (min.) / 55 gal. (max.)
Pump Motor	Single speed, 120 volt, 60 HZ, 5.8 amp,	Floor Loading Weight	47 lbs. / sq. ft. (229 kg/m <sup>2</sup> )
	premounted	Shipping Weight	whirlpool - 148 lbs.
Electrical Requirements	120 volt, 15 AMP, GFCI protected circuit		bathtub - 128 lbs.
On/Off Control	Air Switch	Warranty	Limited One Year

## **Technical Information**

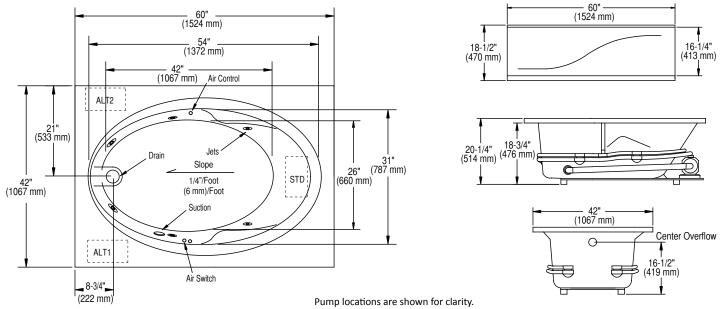

STD - standard pump location. ALT1 and ALT2 - alternate pump locations are optional.

Notes: If a factory installed nailing flange is added to a unit, add 1/8" to each side flanged.

Measurements may vary 1/4" (+/-)

Install this product according to the installation guide.

These dimensions are nominal and subject to change without notice.

When tested for compliance to the requirements of ASME A112.19.7M for "Whirlpool Bath Appliances" and ANSI Z124.1.2M "American National Stanndard for Plastic Bathtub and Shower Units", the tested units are found to comply and are acceptable for listing under IAPMO R & T.

Certified for permanent electrical connection only.

Please visit our website to view IAPMO certification information – www.mansfieldplumbing.com

