

### DESCRIPTION


- Metallic construction with various finishes identified by suffix
- Threaded connection
- Continuous temperature – 120 degrees F Max
- Continuous pressure – 90 psi Max

### FLOW

- 1.2 gpm (4.5 L/min.) Max.
- Aerated flow

### WARRANTY

- Warranted for 1 year against material or manufacturing defects

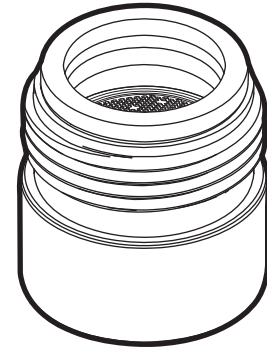

**Aerator and Shell Kit**  
**1.2 gpm (4.5 L/min)**

**Model:** 194995

### Used with Models:

**Method** - T6820 series

**Method** - 6810 series



**Danika** - WSL84733 series

**Danika** - WS84633 series

**Zarina** - WSL84533 series

**Kleo** - WS84900 series

**Eva** - 6400 series

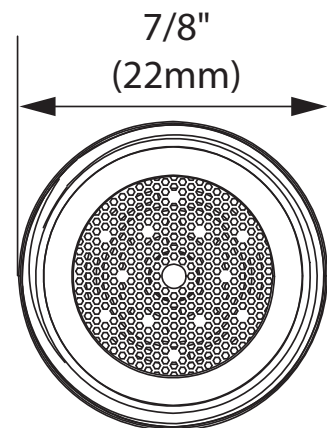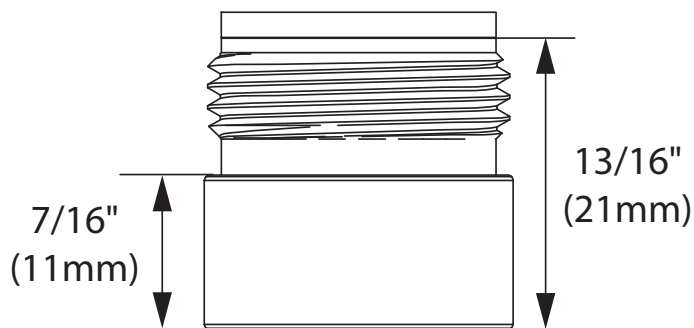

## CRITICAL DIMENSIONS

(DO NOT SCALE)