# MOEN

# Specifications

# Buy it for looks. Buy it for life.®

#### FAUCET DESCRIPTION

- Metal construction with chrome finish
- Includes showerhead, arm, flange and diverter spout

#### OPERATION

- Lever style handle with temperature indicator on the escutcheon
- Handle operates counterclockwise through a 270° arc with off
- at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- $\bullet$  Pressure balancing mechanism maintains selected discharge temperature to  $\pm\,3^\circ$

#### FLOW

- EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi
- NH suffix models contain no showerheads

#### CARTRIDGE

- 1222 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations

#### **STANDARDS**

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are third party certified to WaterSense®
- ADA 🛃 for lever handle

# WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



# Vichy™ POSI-TEMP® Single-Handle Tub/Shower Trim Kit

**Model:** T2661 series - valve trim only T2662EP series - shower trim T2663EP series - tub/shower trim

# Valves: 62300, 2500 series

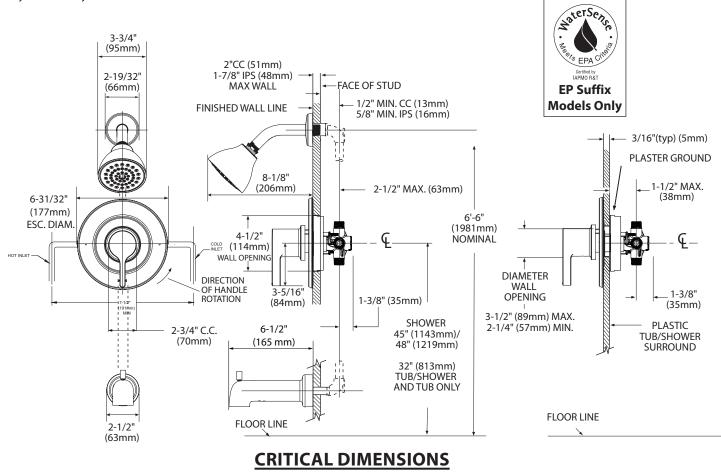

(DO NOT SCALE)

D/22/2017 Released 0

### FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com