MOEN®

DESCRIPTION

• Metal construction with various finishes identified by suffix **OPERATION**


- Temperature operates through an 270° arc of handle travel (full cold to full hot)
- Adjustable temperature limit stop to control maximum hot water temperature
- 90° rotation of transfer valve handle with stops
- Pressure balancing mechanism maintains selected discharge temperature to ± 3°

STANDARDS

- Third party certified to ASME A112.18.1/CSA B-125.1
- ADA 🖲 for lever handles


WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations



Specifications

WEYMOUTH[™] POSI-TEMP[®] with Built-In 3 Function Transfer Valve Trim



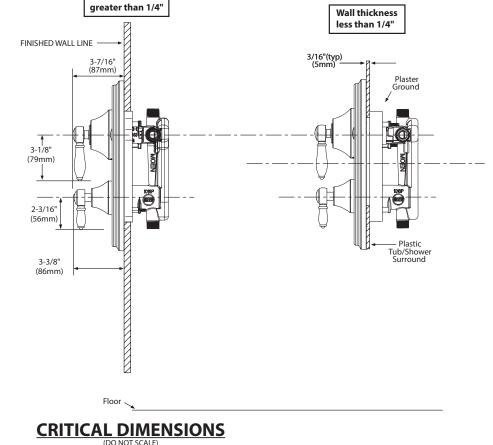

Wall thickness

11-1/2" (292mm) (292mm

Refer to valve specification sheet for cutout dimensions

FOR MORE INFORMATIONL: 1-800-BUY-MOEN www.moen.com