Voss™ Technical Specification

Decorative Tank Lever

YB5101

Stock Numbers:


- П YB5101BN – Decorative Tank Lever **Brushed Nickel Finish**
- YB5101CH Decorative Tank Lever П Chrome Finish
- YB5101ORB – Decorative Tank Lever **Oil Rubbed Bronze Finish**
- YB5101BG – Decorative Tank Lever **Brushed Gold**
- YB5101NL Decorative Tank Lever Polished Nickel

Materials:

Tank Levers are constructed of zinc.

MOEN

Dimensions:

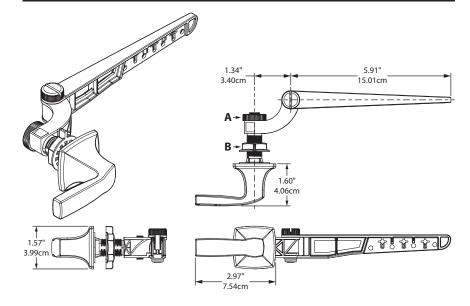

Installation Instructions:

- Remove existing tank lever. 1.
- 2. Remove the arm mechanism from the new tank lever by loosening nut (B).
- 3. Unscrew the tank nut. The thread for the tank nut is a left handed thread.
- 4. Position the new tank lever through the tank hole. The tank lever handle should be pointing away from the toilet bowl.
- 5. Tighten nut. Depending on the curvature of the tank, there might be a slight gap between the outside of the tank and the base of the lever.
- Place the arm mechanism of the tank lever post. Adjust the arm up or down as 6. needed. Tighten nut to secure the arm in place.
- 7. Adjust the arm mechanism from side to side as needed. Make sure the arm does not come into contact with the tank wall or the flush mechanism. Tighten screw (A) to lock the arm in place.
- Attach the flapper valve chain to one of the provided slots on the arm. Be sure to 8. eliminate any slack in the chain.
- 9. Make sure no water is leaking through the flapper when the handle is in its normal position (not flushing). If it is, adjust the arm as needed.

Cleaning Instructions:

To preserve the fine finish of this product, clean only with a soft damp cloth. Dry well. Do not use commercial or abrasive cleaners.

Stock Number:

Tank Lever

By Moen

25300 AL MOEN DRIVE • NORTH OLMSTED, OH 44070 CORPORATE HEADQUARTERS: (800) 321-8809 • FAX: (800) 848-6636 INTERNATIONAL: (440) 962-2000 • FAX: (440) 962-2726 CUSTOMER SERVICE (USA): 800-882-0116 • FAX: (888) 379-2720 WWW.MOEN.COM

© 2019 Moen Incorporated.