


59.5" x 42" x 6" (exterior bottom of base)		
SINGLE THRESHOLD textured floor		
Center Drain		
Acrylic CXL®		
125 lbs / 57 kg		

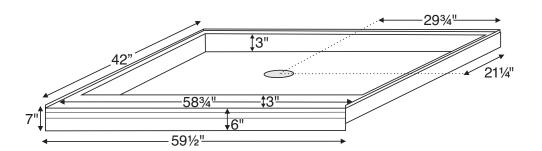

Model #	Size	Shape	MSRP
SB6042CD	59.5" x 42" x 6"	Rectangle	\$1,935

<b>Options</b> Must be ordered at time of purchase	Accessories	
Color Please specify color on order White (CWH)	Drain Kit Options Solid Brass Drain Kit with Stainless Steel Cover (SBDKSB) <b>\$195</b>	
Biscuit (CBS) Quick Ship (QSPRI) \$430 Reduces lead time. Please call for availability.		
Radiance® (RAD100) <b>\$1,595</b> Shower floor heating system. Radiance heating grids are fully integrated within the acrylic shell structure of the shower floor. Requires a 110-volt, 15 amp GFCI and remote installation of control box & keypad.	High-Polished Stainless (TK-SSEAT2416BHP) <b>\$3,465</b> Standard Natural Stainless (TK-SSEAT2215NS) <b>\$1,125</b> High-Polished Stainless (TK-SSEAT2215HP) <b>\$1,575</b>	
Pre-Leveled Foam Base (PLFSB) \$220	Teak Bath Mat (TKMAT3018) \$815 Measures 30" x 17.5" x 1"           Custom sizes also available. Contact MTI for details.	
PVC Drain Kit Finishes Chrome included with shower base Brushed Nickel upcharge (SBDKBN) <b>\$65</b>	Teak Shower Tray (TK6042CD)         Contact MTI for pricing	

## **IMPORTANT ORDERING & INSTALLATION INFORMATION**

- . 3-sided integral tile flange to facilitate installation.
- . Single threshold design.
- 3.5" drain opening pre-drilled.
- Drain finish options on this sheet are upcharge prices only. Contact . MTI for ordering details for drain kits sold seprately.
- . Compliant with ASTM C 1028-07 coefficient of friction test.
- . Add proper wet-bedding compound to fully support bottom of shower base. Optional factory installed Pre-Leveled Foam Base negates the need to wet bed when installing on a flat, level subfloor. See installation instructions.



Options and accessories may be packaged inside the box. Always check packaging
before discarding.

- All product measurements are ±1/2".
  Specifications and configurations are subject to change without notice.
  Measurements herein supersede all others published prior to publication date below.

See the Installation & Operation Manual for more details. MTI's Customer Service: Monday-Friday 8am-6pm EST

800-783-8827 or service@mtibaths.com