

# Features

- Two-piece design.
- Elongated bowl offers added room and comfort.
- 1.28 gpf (4.8 lpf).
- Color-matched right-hand white trip lever included.
- 2" (51 mm) fully glazed trapway.
- Combination consists of the 403378 bowl and 404501-RA tank.

# Technology

 Pro Force<sup>®</sup> Plus flushing technology delivers greater flushing power than previous Pro Force<sup>®</sup> models.

## Installation

- Standard 12" (305 mm) rough-in.
- Three-bolt quick-connect installation.
- Seat and supply line sold separately.

## **Recommended Products/Accessories**

K-20110 Brevia<sup>™</sup> Quiet-Close<sup>™</sup> Elongated Toilet Seat K-4636 Cachet® Quiet-Close<sup>™</sup> Elongated Toilet Seat K-5420 Low-Profile Bolt Caps K-23726 Drain treatment

# **Included Components**

Product consists of: 403378 Elongated toilet bowl 404501-RA Toilet tank





## **Codes/Standards**

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC)

# STERLING<sup>®</sup> Warranty - Toilets and Lavatories

See website for detailed warranty information.

# **Available Colors/Finishes**

Color tiles intended for reference only.

**Color Code Description** 


0 White

# Valton™

Two-piece elongated toilet 402312-RA



Valton™ Two-piece elongated toilet 402312-RA

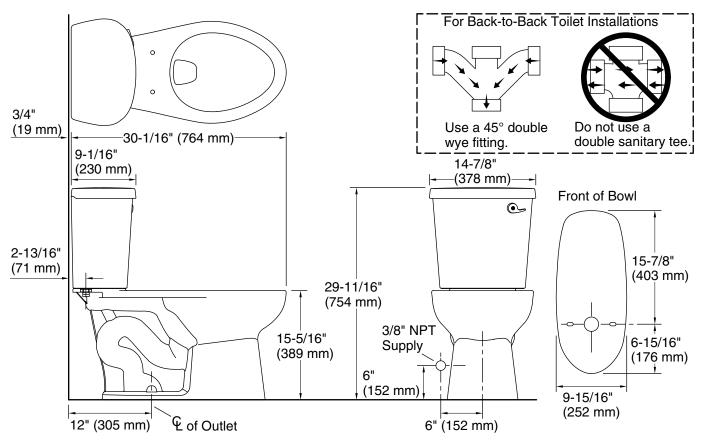

## **Technical Information**

All product dimensions are nominal.	
Toilet type:	Two-piece, Floor-mount
Waste Outlet:	Floor
Bowl shape:	Elongated
Flush type:	Gravity siphon jet
Water Consumption	
Full:	1.28 gpf (4.8 lpf)
Rough-in:	12" (305 mm)

## Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a  $45^{\circ}$  double wye fitting.

## **Fixture Supply Requirements**

Min static pressure: 15 psi (103.4 kPa) Max static pressure: 80 psi (551.6 kPa)