




Model 53 - Cast Iron Series

EFFLUENT OR DEWATERING PUMP MATERIAL SPECIFICATIONS:

- .3 HP, 220V, 1 Ph, 50 Hz.
- Non-Clogging Vortex Impeller design.
- Passes 13 mm spherical solids.
- 1½" NPT discharge.
- Automatic reset thermal overload protection.
- Float operated 2-pole mechanical switch.
- Corrosion resistant powder coated epoxy finish.
- Stainless steel screws, guard, handle and switch arm assembly.
- Cast iron switch case, motor and pump housing.
- Engineered polypropylene base.
- Maximum temperature 54°C.

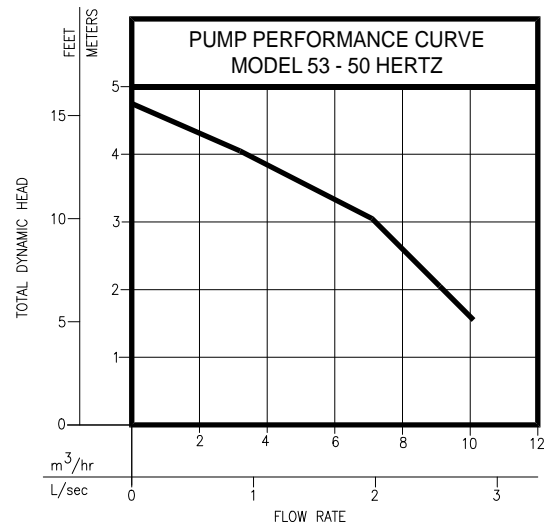

009942

Model	Volts	Ph	Mode	Input kw	Amp
U53	220	1	Auto	0.7	5.2
V53	220	1	Nonauto	0.7	5.2

Note: Model U53 available with UK plug.

All models completely submersible and hermetically sealed.




Models 152 & 153 - Dose Mate Series

FOR SEPTIC TANK - LOW PRESSURE PIPE AND ENHANCED FLOW STEP SYSTEMS

MATERIAL SPECIFICATIONS:

- 1/2 HP, 220 V, 1 Ph, 50 Hz.
- Non-Clogging Vortex Impeller design.
- Passes 19 mm spherical solids.
- 1½" NPT vertical discharge.
- Motor - oil-filled, hermetically sealed, automatic reset thermal overload protected.
- Corrosion resistant powder coated epoxy finish.
- Stainless steel bolts and lifting handle.
- Carbon/Ceramic seals.
- Upper sleeve bearing and lower ball bearing running in bath of oil.
- Maximum temperature 54°C.
- All models include a 1½" x 2" PVC adapter fitting.

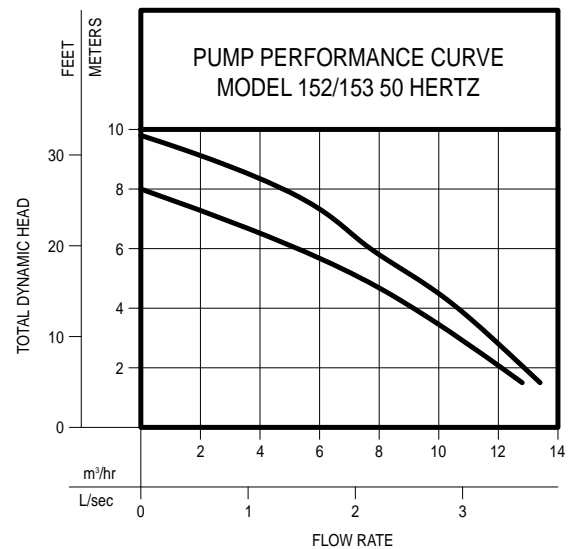

019330

Model	Volts	Ph	Mode	Input kw	Amp
U152	220	1	Auto	0.6	3.6
V152	220	1	Nonauto	0.6	3.6
U153	220	1	Auto	0.7	4.3
V153	220	1	Nonauto	0.7	4.3

"QUALITY PUMPS SINCE 1939"

