

1.75 gpm multifunction handshower with Katalyst[®] **K-22166-G**

Features

- Advanced spray engine provides three experiences: full coverage, pulsating massage and silk spray.
- Full coverage spray produces an encompassing spray for everyday use and utilizes Katalyst[®] air induction to create large, full drops.
- Pulsating massage spray targets sore muscles to ease away aches and pains.
- Silk spray releases a dense, luxurious spray ideal for rinsing.
- Thumb tab allows for a smooth transition between sprays.
- Combination of balance, weight, grip, and angle makes this handshower comfortable and easy to use.
- MasterClean[™] spray nozzles prohibit mineral build-up for easy cleaning.
- 1.75 gpm (gallons per minute) flow rate.
- Requires K-8593, K-9514, K-98360, K-98359, K-45981, or K-45982 shower hose (sold separately).
- Coordinates with Purist[®], Stillness[®] and Composed[®] faucets and accessories.

Material

KOHLER finishes resist corrosion and tarnishing.

Installation

- Bracket or slidebar required for wall-mount installation.
- Deck-mount holder required for deck-mount installation.

Water Conservation & Rebates

 This product can help a building earn Water Efficiency points in the LEED green Building Rating System.

Required Products/Accessories

K-8593 72" Shower Hose K-9514 60" Shower Hose K-9660 Vacuum Breaker

or

K-45981 72" ribbon hose K-45982 60" ribbon hose K-9660 Vacuum Breaker

or

K-9660 Vacuum Breaker K-98359 60" Smooth Shower Hose K-98360 72" Smooth Shower Hose





Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC

KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color Code Description

- CP Polished Chrome
- SN Vibrant® Polished Nickel
- BN Vibrant® Brushed Nickel
- BV Vibrant® Brushed Bronze
- BL Matte Black
- TT Vibrant Titanium



Purist®

1.75 gpm multifunction handshower with Katalyst® K-22166-G

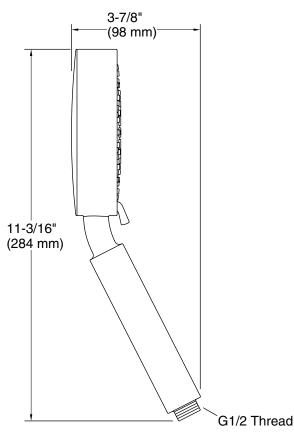


Technical Information

All product dimensions are nominal. Drain included: No

KOHLER, Faucets

Handshower:

Rated maximum flow: 1.75 gal/min (6.6 l/min)

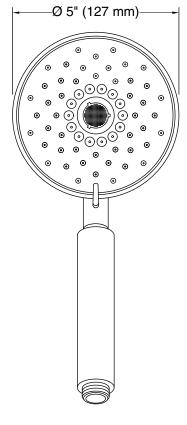

Notes

Install this product according to the installation instructions.

Plumbing codes require an atmospheric vacuum breaker be installed in-line with handshowers. Please consult with local plumbing officials. ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

